



Twist-in foot

For small Single frames
IS-9060



Twist-in half foot

For small and medium Single frames to be placed
against a wall
IS-9061



Twist-in foot, extra stable

For medium size Single frames
IS-9063

Connect the twist-in foot




1 Attach the foot parallel to the profile, at any desired position.



2 Twist the foot to lock in place. Foot can be twisted in either direction, depending on which end you prefer for the front of your display.



3 Twist to 90° and stop.

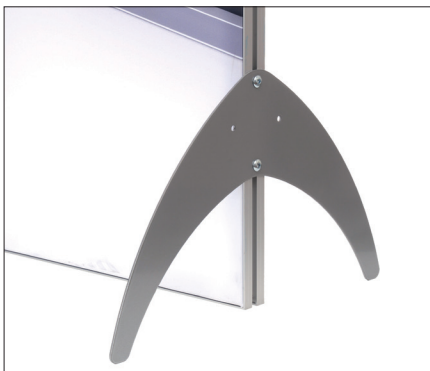

Arched Side Foot


For Large size Single frames and to stabilize the ends
of a stand.
IS-9342




Arched Half Side Foot

For large size Single frames to be placed against a
wall
IS-9612


Connect the Arched Foot

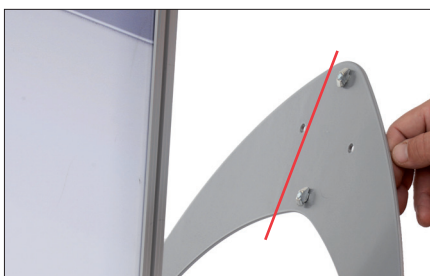

1 Open the screws and arrange the twist nuts in a vertical position.

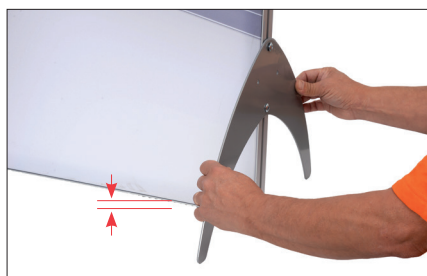

2 Attach the foot to the frame, arrange the frame approx. 10-12 mm / 1/2" from the floor.

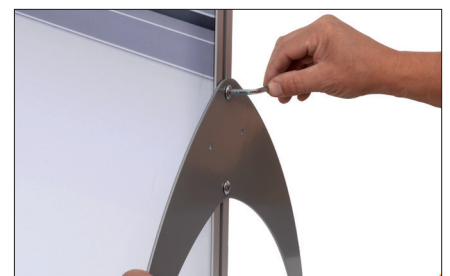

3 Lock the two screws with the included Allen key.